

# Mono Laser Printer

**i-SENSYS**  
LBP6300dn

you can



## Share speed, quality and productive performance

This network ready, compact mono laser printer - complete with automatic double-sided printing - delivers the performance and productivity that dynamic small and medium-sized businesses demand.

**30 PPM**  
MONO LASER  
PRINTING

PAPER CAPACITY  
MAX. 800-SHEET

QUICK  
FIRST-PRINT

UP TO  
2400 X 600 DPI  
PRINT RESOLUTION

AUTOMATIC  
DOUBLE-SIDED  
PRINTING

### Key features

- Compact, 30 ppm mono laser printer
- Productive automatic double-sided printing
- Network ready with Remote User Interface (RUI)
- Fast First Print Out Time: 6 seconds or less
- No waiting with Quick First-Print technologies
- Up to 2400 x 600 dpi print resolution with AIR (Automatic Image Refinement)
- Max. 800-sheet paper capacity (250-sheet cassette, 50-sheet multi-purpose tray, optional 500-sheet cassette)
- Energy efficient and silent in standby
- Maintenance-free All-in-One cartridge for continuous high quality output

### What's in the Box

Main unit, Cartridge 719, power cord, quick setup guide and warranty card - with user software and manual CDs.

### Dimensions (W x D x H)

400 x 376 x 260 mm

### Supported OS

**Windows** 2000/ Server 2003/ Server 2008/ XP/ Vista/ 7  
**Mac OS X** version 10.4.9-10.6.x  
(Web distribution only, English driver only)  
**Linux** (Web distribution only, English driver only)



PRINT



COPY



FAX



SCAN

**Canon**

# i-SENSYS

## LBP6300dn

### Specifications



- 1 50-sheet multi-purpose tray
- 2 250-sheet cassette
- 3 Optional 500-sheet cassette
- 4 Cartridge 719 All-in-One
- 5 Optional Cartridge 719 H All-in-One

<b>PRINTER ENGINE</b> Print speed Printing method Print quality Print resolution Warm-up time First Page Out Time Duty cycle Print margins	30 ppm mono (A4) Monochrome laser beam printing Up to 2400 x 600 dpi with Automatic Image Refinement Up to 600 x 600 dpi Approx. 10 seconds or less from power on Approx. 6 seconds or less Max. 25,000 pages per month 5 mm-top, bottom, left and right
<b>MEDIA HANDLING</b> Paper input (Standard) Paper input (Option) Paper output Media types Media sizes Media weights Double sided printing	250-sheet cassette 50-sheet multi-purpose tray 500-sheet cassette 150-sheet face down Plain paper, Heavy Paper, Transparency, Label, Index card, Envelope Cassette (Standard and optional): A4, B5, A5, A6, Legal, Letter, Executive, 16K, Custom sizes: Width 105 mm to 215.9 mm; Length 148.0 mm to 355.6 mm Multi-purpose tray: A4, B5, A5, A6, Legal, Letter, Executive, 16K, Envelope DL, Envelope COM10, Envelope C5, Envelope Monarch, Index Card 76.2 mm x 127 mm, Custom sizes: Width 76.2 to 215.9 mm; Length 127.0 to 355.6mm Cassette (Standard and optional): 60 to 120 g/m <sup>2</sup> Multi-purpose tray: 60 to 163 g/m <sup>2</sup> Automatic
<b>GENERAL FEATURES</b> Power requirements Power consumption	220-240V (±10%) 50/60Hz (±2Hz) Maximum: Approx. 1140 W or less Active: Approx. 570 W Standby: Approx. 9 W Typical Electricity Consumption (TEC): 2.03 kWh/week

Noise level Dimensions (W x D x H) Weight Operating environment Control panel	Sound power <sup>1</sup> : Active: 6.95 B or less Standby: 4.3 B or less Sound pressure <sup>1</sup> : Active: 53.5 dB(A) or less Standby: Inaudible Approx. 11.8 kg Temperature: 10 to 30°C (50 to 86°F) Humidity 20 to 80% RH (no condensation) 5 LED indicators 1 Operation key
<b>CONTROLLER</b> Memory Printer languages Interface and connectivity Software and printer management Operating systems compatibility	16 MB Canon Advanced Printing Technology (CAPT) USB 2.0 High-Speed, 10BASE-T/100BASE-TX NetSpot Device Installer, Remote User Interface (RUI) Windows 2000/ Server 2003/ Server 2008/ XP/ Vista/ 7 Mac OS X Version 10.4.9-10.6.x <sup>2,3</sup> Linux <sup>2,3</sup>
<b>CONSUMABLES</b> All-in-One cartridges	Standard: Cartridge 719 (2,100 pages <sup>4</sup> ) High yield: Cartridge 719 H (6,400 pages <sup>4</sup> )
<b>ACCESSORIES/ OPTIONS</b> Items	PAPER FEEDER PF-44 (500-sheet cassette)
All specifications subject to change without notice <sup>1</sup> Declared noise emission in accordance with ISO 9296 <sup>2</sup> Web distribution only <sup>3</sup> English driver only <sup>4</sup> Based on ISO/IEC 19752	



Canon Inc.  
www.canon.com

Canon Europe  
www.canon-europe.com

English-UK Edition  
© Canon Europe 2010


Canon (UK) Ltd  
Woodhatch, Reigate  
Surrey RH2 8BF  
Telephone No: 01737 220000  
Facsimile No: 01737 220022  
www.canon.co.uk

Canon Ireland Arena  
Road, Sandyford  
Industrial Estate  
Dublin 18, Ireland  
Telephone No: 01 2052400  
Facsimile No: 01 2958141  
www.canon.ie

# Mono Laser Printer

**i-SENSYS**  
LBP6300dn

you can

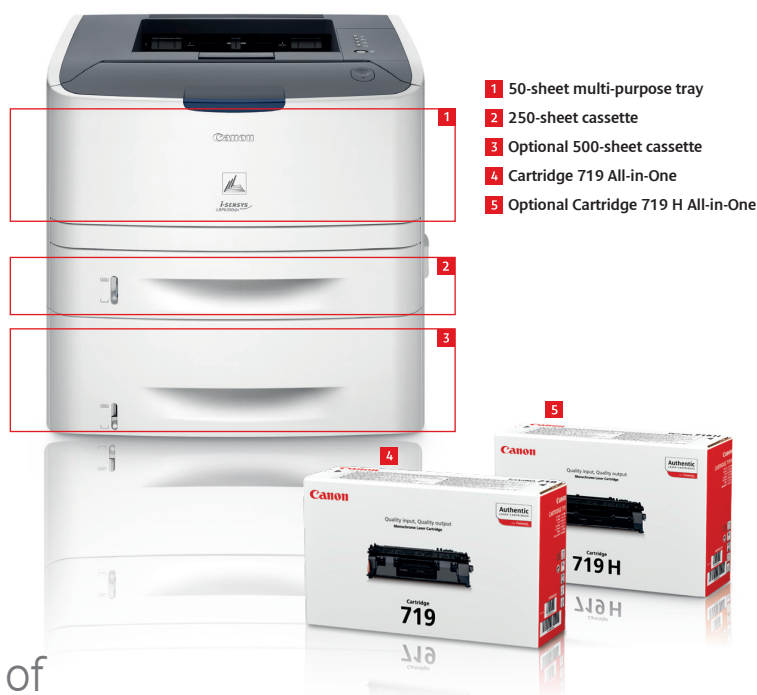

## Share speed, quality and productive performance

The i-SENSYS LBP6300dn is part of the Canon Mono Laser Printer Range

Sales Start Date: **March 2010**

### The whole range consists of:

Mono: LBP3460, LBP6650dn, LBP3370, **LBP6300dn**, LBP3310, LBP3250, LBP3100, LBP3010

### Box Dimensions (W x D x H)

452 x 517 x 369 mm

### Box weight

Approx. 15 kg

### Packet style

Pallet

### Quantity

12

### MERCURY CODES

#### PRODUCT

PRODUCT Name	Mercury Code	EAN Code
LBP6300dn	3550B007AA	8714574546889

#### OPTIONS

Accessories	Mercury Code	EAN Code
PAPER FEEDER PF-44	3439B001AA	4960999630540

#### CONSUMABLES

Toner	Mercury Code	EAN Code
Cartridge 719 (2,100 pages*)	3479B002AA	4960999650289
Cartridge 719 H (6,400 pages*)	3480B002AA	4960999650319

#### EASY SERVICE PLAN

Details	Mercury Code	EAN Code
3 year return to base service-S3	093ZZ322	8714574979724
3 year on site next day service-S3	093ZZ335	8714574979823
Installation Service-N1	093ZZ324	8714574979748

\* Based on ISO/IEC 19752



PRINT



COPY



FAX



SCAN

**Canon**