

you can
Canon

i-SENSYS
FAX-L3000

i-SENSYS
FAX-L3000IP

Advanced Laser Faxes

Delivering robust and
productive faxing
plus advanced functionality

Enhance
productivity

Ensure
reliability



i-SENSYS FAX-L3000/L3000IP

The smartest fax solution for busy departments and enterprises

Take dedicated laser faxing to new levels of efficiency, to meet your most demanding workloads. The i-SENSYS FAX-L3000 is a standalone fax with the option to upgrade to a network printer. The i-SENSYS FAX-L3000IP is a standalone fax and network PCL printer, with an option to upgrade to scan to e-mail and network (SMB & FTP) functionality. Designed to enhance productivity and ensure durability, they are the ideal solution for busy departments and enterprises.

Save time and cut costs

Get fast and ultra efficient Super G3 faxing at 33.6 Kbps. Rapid duplex scanning speeds save even more time - at 37 A4 images per minute for the FAX-L3000 and 45 ipm (A4) for the FAX-L3000IP. The latter can even send or copy A3 single-sided documents. To enhance productivity further you can dial all your regular contact numbers directly - with 80 one-touch speed dials and 200 coded dials (upgradeable to 500 for the FAX-L3000IP).

Robust and reliable faxing

Both models combine a durable design with an extra large 1,100-sheet total paper capacity¹ for handling heavy-duty workloads. A maximum 1500-page² fax memory and a 3 hour memory back-up ensure all data is safely stored in the event of a power failure or if the paper or toner run out. Double-sided documents can be faxed or copied efficiently thanks to the 50-page Duplex Automatic Document Feeder.

Security and cost control

Controlling security and costs is crucial in shared working environments such as open office spaces. Both faxes feature Department and User ID management, restricting machine access to authorised staff while also enabling monitoring of costs. Exclusive access to device settings via the System Manager ID ensures tamper-proof control. The Direct Mail preventative function blocks unsolicited 'junk' faxes without a recognised ID. Fax archiving automatically forwards a copy of transmitted faxes to your archive folder³. Incoming faxes can also be strictly monitored - with the Reception Footer showing the exact time and date each document is received.



1. 500-sheet cassette, 100-sheet multipurpose tray and optional 500 sheet cassette
2. Standard for the FAX-L3000IP, optional for the FAX-L3000. Based on ITU-T Standard Chart No. 1
3. FAX-L3000IP only with optional SEND kit

AVAILABLE FUNCTIONS

	i-SENSYS FAX-L3000	i-SENSYS FAX-L3000IP
Super G3 faxing	✓	✓
Copying	✓	✓
Printing	Optional	✓
50-page Duplex Automatic Document Feeder	✓	✓
Network printing & PC faxing with Remote User Interface	Optional	✓
PCL5e, PCL 6 support	X	✓
Fax Memory	Standard 512 pages*, optional 1500 pages*	Standard 1500 pages*
Security - ID Management	✓	✓
SEND functionality	X	Optional Scan to email, Server and I-FAX
Standard Paper capacity	500-sheet cassette, 100-sheet MP tray	500-sheet cassette, 100-sheet MP tray
Optional 500-sheet cassette	✓	✓

* Based on ITU-T Standard Chart No. 1



Enhanced energy efficiency

Using only 3 watts in sleep mode, these two energy-efficient faxes help reduce your power consumption and are environmentally friendly. There's no waiting around or wasting time as Quick First Print performance ensures rapid print output - with zero warm-up time from sleep mode. The end result is that your business benefits from high speed, high quality output combined with conscientious and cost-reducing energy efficiency.

Ultra High Quality transmission for text, graphics and photos

Now you can fax detailed documents that contain a combination of text, graphics and photos - and be certain that each and every element comes out clearly. Canon's UHQ (Ultra High Quality) image processing system provides halftone reproduction in 256 shades of grey with a special Edge Enhancement feature - to ensure extra depth and clarity. So you can always rely on faxing perfection when communicating with customers and clients.



Optimise performance

Increase efficiency

Exceptional versatility... to increase productivity and performance

These versatile laser faxes are ready to bring enhanced productivity to every area of your business – with advanced copying, scanning and duplexing. The FAX-L3000IP even provides printing, networking and PCL support as standard, for unparalleled performance. Get through more work in less time... and meet your most demanding deadlines.

Flexible copy and print¹ functionality

Boost business productivity with advanced copy and print functionality. Both models can be used as standalone copiers, delivering high quality laser output at a fast 22 cpm (A4). Professional printing at the same high speed is a standard feature of the FAX-L3000IP... and can be added to the FAX-L3000 as an option¹. Take advantage of a complete fax, copy and print solution, with each function performing at the highest level.

Built-in networking to accelerate workgroup productivity²

The FAX-L3000IP offers built-in networking as standard. This provides productive network printing and PC faxing to all connected users on your network. It comes complete with a Remote User Interface so all workgroup users can check the machine status directly from their web browsers. At the same time, network administrators can configure, monitor and manage the machine remotely. With complete management control, you can reduce administration costs to a minimum.

PCL support for full compatibility with PCL print environments²

PCL5e and PCL6 compatibility enables the FAX-L3000IP to be integrated easily and seamlessly into your existing PCL printing environment. Both models support Canon's own proprietary printer technology, UFR II-LT, which speeds up image processing and print output. The printer driver provides access to all printer settings via a user-friendly graphical interface, adding to overall ease of use.



1. *Optional for FAX-L3000 with UFR II-LT printer kit*
2. *FAX-L3000IP only*

- 1 **50-page DADF (Duplex Automatic Document Feeder)**
- 2 **Built-in duplex unit for double-sided printing***
- 3 **Easy-to-use control panel with backlight LCD**
- 4 **Standard 500-sheet cassette**
- 5 **Optional 500-sheet cassette**
- 6 **Optional telephone handset**

* *Optional for FAX-L3000 with UFR II-LT printer kit*



Professional double-sided output with reduced paper costs

Automatic double-sided faxing, copying and printing¹ increase productivity and, at the same time, cut your paper costs considerably. Duplexing also gives your documents and reports a professional look. The 50-page Duplex Automatic Document Feeder speeds up output - scanning double-sided documents fast and efficiently. Lengthy documents can be faxed and copied with ease, without the hassle of having to split them up.

Hassle-free, high quality All-in-One Cartridge

Canon's unique All-in-One cartridge provides continuous, high quality output and cost-effective printing. Incorporating toner, drum and cleaning units in one compact cartridge, it reduces maintenance requirements while increasing reliability. It can be replaced in seconds, without any mess or hassle, making your machine practically as good as new.

Maximise
functionality

Cut costs to
a minimum

Authentic
LASER CARTRIDGES
FOR i-SENSYS



Upgrade anytime... and radically enhance your workflow efficiency

As your business grows, Canon's i-SENSYS laser faxes are ready to meet your ever expanding requirements, providing a future-proof investment. Discover how you can enhance efficiency... and manage information easily and intelligently, to speed up your workflow.

Work smarter

Simplify your office workflow

POWERFUL SEND FUNCTIONALITY¹

Share information easily


Optional SEND functionality transforms the FAX-L3000IP into a central communication hub for sharing documents digitally, boosting workflow productivity. Users can scan colour documents direct to email, network server (SMB or FTP) or Internet Fax, effortlessly. Canon's compact PDF technology reduces file sizes for transmission while maintaining quality. An extra 300 coded dials (500 max.) and a maximum fax memory of 1500 pages enables you to make full use of SEND functionality.

Scan straight to email and server

Speed up and simplify your office workflow and save time by scanning documents directly to email or network server. Universal SEND allows transmission to multiple destinations and devices simultaneously, enhancing overall efficiency. Internet Fax transmission enables paper documents to be sent at reduced or even zero cost between compatible machines, saving on call charges.

Increase uptime with time-saving e-maintenance

With the optional SEND kit installed, the FAX-L3000IP is compatible with Canon's e-maintenance service. This offers remote monitoring and diagnostics, with real time incident notification. Benefits include increased machine uptime, quicker service response times and easy consumables management - for real peace of mind.

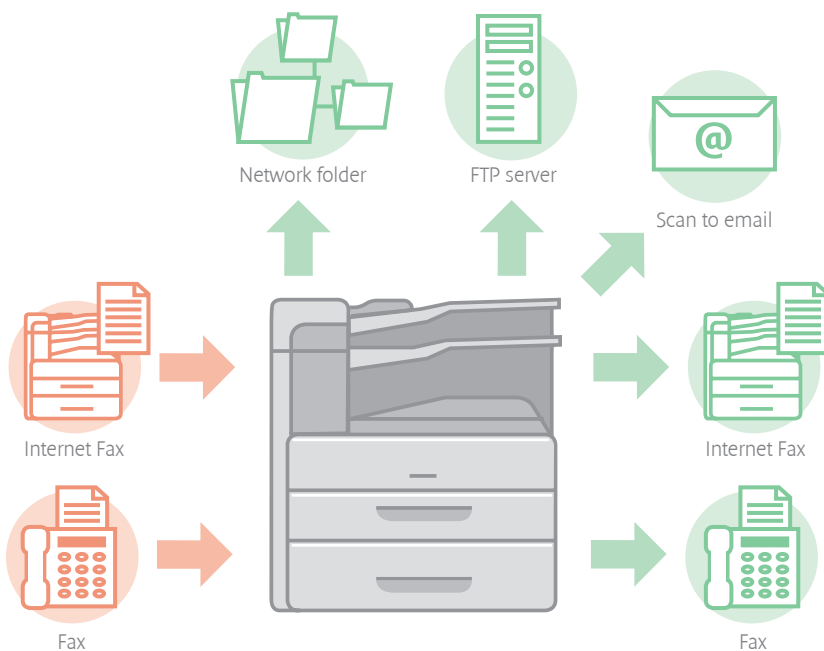



Add on productive printing, networking and PC faxing²

With the optional print kit, the FAX-L3000 offers productive and professional laser print functionality. At the same time, it provides seamless network printing and PC faxing to all connected users on your workgroup network. This includes a Remote User Interface so users can check machine status and network administrators can monitor and manage settings - all direct from their web browsers.

Meet high volume demand with an extra large paper supply

An optional 500-sheet cassette for both fax models takes your total paper supply up to a maximum of 1,100 sheets. This allows you to meet the most demanding heavy-duty use, without worrying about having to constantly refill the tray.

1. Optional for FAX-L3000IP only

2. With UFR II LT P. KIT-X1

AVAILABLE OPTIONS

	i-SENSYS FAX-L3000	i-SENSYS FAX-L3000IP
SEND functionality	X	Optional*
Printing, networking, PC faxing	Optional**	Standard
Additional 500-sheet cassette	Optional	Optional
Telephone handset	Optional	Optional
Stamp unit	Optional	Optional

* With COLOUR SEND KIT M1

** With UFR II LT P. KIT-X1

Specifications i-SENSYS FAX-L3000/L3000IP

FAX UNIT TYPE Type Compatibility Applicable line Modem speed Print technology Scanner type	Standalone facsimile with optional upgrades Group 3 Public Switched Telephone Network (PSTN) 33.6 Kbps (Super G3) Laser beam printing Sheet fed
FAX SCANNING FEATURES Automatic document feeder Document size Effective scanning width Scanning speed (A4 mono) Fax resolution Image processing system Halftone	50 sheets (80 g/m ² paper) Max A4: i-SENSYS FAX-L3000: Max 216 x 355.6 (Max. 630mm) i-SENSYS FAX-L3000IP: Max. 297 x 432 mm (Max. 630 mm) Min. 148 x 148 mm A4(210mm) i-SENSYS FAX-L3000: 37 ipm i-SENSYS FAX-L3000IP: 45 ipm FINE: 203 pels/in. x 196 lines/in. (8 pels/mm x 7.7 lines/mm) PHOTO: 203 pels/in. x 196 lines/in. (8 pels/mm x 7.7 lines/mm) SUPER FINE: 203 pels/in. x 392 lines/in. (8 pels/mm x 15.4 lines/mm) ULTRA FINE: 406 pels/in. x 392 lines/in. (16 pels/mm x 15.4 lines/mm) STANDARD: 203 pels/in. x 98 lines/in. (8 pels/mm x 3.85 lines/mm) UHQ (Ultra High Quality) 256 shades of grey scale
TRANSMISSION AND RECEPTION FEATURES Transmission speed Compression method Direct transmission Memory transmission Quick Memory Transmission FAX memory Memory backup Memory reception Remote Reception Dual access Error correction mode (ECM) Delayed transmission Sequential broadcast Fax Forwarding Error re-transmission Fax Archive Fax transfer	3 seconds per page with 33.6K bps modem MH, MR, MMR, JBIG Yes Yes Yes i-SENSYS FAX-L3000: 512 pages*. Max 1500 pages with optional UFR II LT P. KIT-X1kit i-SENSYS FAX-L3000IP: 1500 pages* Yes, approx. 3 hours Yes Yes Yes Yes Yes 201 locations i-SENSYS FAX-L3000IP: Max 501 locations with optional SEND kit Yes Yes i-SENSYS FAX-L3000IP only (with optional SEND KIT) Yes
SECURITY AND MANAGEMENT FEATURES Password user restriction Direct mail prevention Forced memory reception System management password Usage management by code (User & Dept ID) Reports Transmission header Reception footer Verification stamp	Yes Yes Yes Yes Yes 1-touch list, coded dial list, group dial list, user's data list, dept. info list, activity report, tx/rx report, forwarding conditions list Yes Yes Yes (option)
TELEPHONY FEATURES One touch dials Coded dials Group dials Program dial Redial Dial search FAX/TEL auto switch Answering machine hook up Remote reception On hook key Telephone handset Type	80 locations 200 dials i-SENSYS FAX-L3000IP: 500 dials with optional COLOUR SEND KIT-M1 199 dials i-SENSYS FAX-L3000IP: 499 dials with optional COLOUR SEND KIT-M1 Yes Yes (Automatic and manual) Yes Yes Yes Yes Yes Optional Tel 6
COPIER FEATURES Auto Duplex copy (2 on 2) Memory copy Direct copy Copy resolution Copy speed (Mono) Multiple copy Reduction Enlargement Other	Yes Yes Yes 600 x 600 dpi 22 copies per minutes Up to 99 copies 50%, 70% 141%, 145% Electronic sort, Less than 13 secs FCOT, less than 19 secs warm-up time from Power ON.

FAX PRINTING FEATURES PC Printing Page Description Language Printing method Print speed Print resolution Smoothing Paper input capacity Optional cassette Multi Purpose Tray Print cartridge Yield Page collated print (on reception) Paper output tray capacity Media types Paper sizes Printing width Toner save mode Auto image reduction on reception	i-SENSYS FAX-L3000: optional USB & Network printing via UFR II-LT print kit i-SENSYS FAX-L3000IP: via USB & Built-in Network Interface card i-SENSYS FAX-L3000: UFR II-LT i-SENSYS FAX-L3000IP: PCL 5e, PCL 6 & UFR II-LT Laser Beam Printing 22 pages per minutes (A4) 600 x 600dpi 1200 x 600 dpi (enhanced) Yes 500 sheets paper cassette (64 to 80 g/m ²) 500 sheets paper cassette (64 to 80 g/m ²) 100 sheet auto sheet feeder (56 to 128 g/m ²) Cartridge 714 4500 pages (Based on 5% coverage) Yes (Face down print) 100 sheets (80 g/m ² paper) Plain paper, heavy paper, recycled paper, transparency, label, envelope LTR, LGL, A4, B5, A5, Executive, Envelope (COM10, Monarch, DL, ISO-C5) 216mm Yes Yes (100 to 50%, 70%)
NETWORKING Functionality Type Connection type Network protocols	i-SENSYS FAX-L3000: Printing & PC Faxing with optional UFR II LT-P.KIT-X1 i-SENSYS FAX-L3000IP: Printing & PC Faxing, Optional SEND functionality Ethernet (10BaseT/100BaseT) RJ45 TCP/IP, IPX/SPX
SEND FUNCTIONALITY (i-SENSYS FAX-L3000IP ONLY WITH OPTIONAL SEND KIT) Scan to email Scan to Server i-FAAX Universal SEND File formats	Yes FTP and SMB Yes Yes TIFF (B&W), PDF (B&W), JPEG (Color), PDF (Compact) (Color)
PC INTERFACE Interface type Software Supported OS PC FAX (TX only) Printer drivers Other features Bundled Software	USB 2.0 Hi-Speed (i-SENSYS FAX-L3000: Printing and PC faxing require optional kit), 10/100 base Tx (i-SENSYS FAX-L3000IP only) Windows 98, Me, 2000, XP, 2003 Server, VISTA MAC OS X (Power PC) 10.2.8 ~ 10.4.10 (Printing, PC faxing (TX only)) Web distribution only MAC OS X (Intel PC) 10.4.4 ~ 10.4.10 (Printing, PC faxing (TX only)) Web distribution only Yes, i-SENSYS FAX-L3000 with optional UFR II LT Printer KIT-X1 PCL 5e and PCL 6 (i-SENSYS FAX-L3000IP only), UFR II-LT (i-SENSYS FAX-L3000 with optional kit) NetSpot Device Installer, Canon Font Manager, Canon LPR2**
GENERAL FEATURES Display Languages Memory Energy saver key Dimensions without handset and Option cassette Dimensions with Option cassette Installation space including handset and option cassette (D x W) Weight Power source Power consumption Acoustic Noise Levels	Type: Backlight LCD Size: 20 x 2 Bulgarian, Catalan, Croatian, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hungarian, Italian, Norwegian, Polish, Portuguese, Romanian, Russian, Slovakian, Slovenian, Spanish, Swedish, Turkish i-SENSYS FAX-L3000: Standard: 64 MB(Shared) Optional Print kit includes 64MB DDR memory i-SENSYS FAX-L3000IP: Standard: 128 MB(Shared) Optional Print kit includes 128MB DDR & 128MB USB memory Yes 451mm (H) x 492mm (D) x 520 mm (W) 480mm (H) x 492mm (D) x 520 mm (W) 1027mm x 974mm Approx. 24 Kg AC 200-240V 50-60Hz Max:1010w Standby: 17W Sleep: 3w i-SENSYS FAX-L3000IP: 3.5w Standby: under 25 dB(A) Operation: under 66.7 dB(A)
OPTIONS Items	UFR II LT P. KIT-X1 - (Printing, Networking and PC faxing) (i-SENSYS FAX-L3000 only) COLOUR SEND KIT M1 (i-SENSYS FAX-L3000IP only) FXL-CST FEEDER 8(A4) - 500 sheet cassette Tel 6- Telephone handset with cradle Verification Stamp Unit
* based on ITU-T Standard Chart No.1 ** only available for the i-SENSYS FAX-L3000IP	
Some images are simulated for clarity of reproduction. All data is based on Canon's standard testing methods. This leaflet and the specifications of the product have been developed prior to the date of product launch. Final specifications are subject to change.™ and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.	



you can
Canon

Canon Inc.
www.canon.com

Canon Europa N.V.
www.canon-europe.com

English-UK Edition
© Canon Europa N.V., 2007 (0907)

Canon (UK) Ltd
Woodhatch, Reigate
Surrey RH2 8BF
Telephone No. 08000 353535
Fax No. 01737 220 022
www.canon.co.uk

Canon Ireland
Aran Road
Sandyford Industrial Estate
Dublin 18, Ireland
Telephone No. 01-205 2400
Fax No. 01-295 8141
www.canon.ie



Canon
Europe, Middle East & Africa
Conservation Partner