


# HL-2170W

At your side.  
**brother**®

Professional, high quality mono laser printer with wired and wireless network as standard

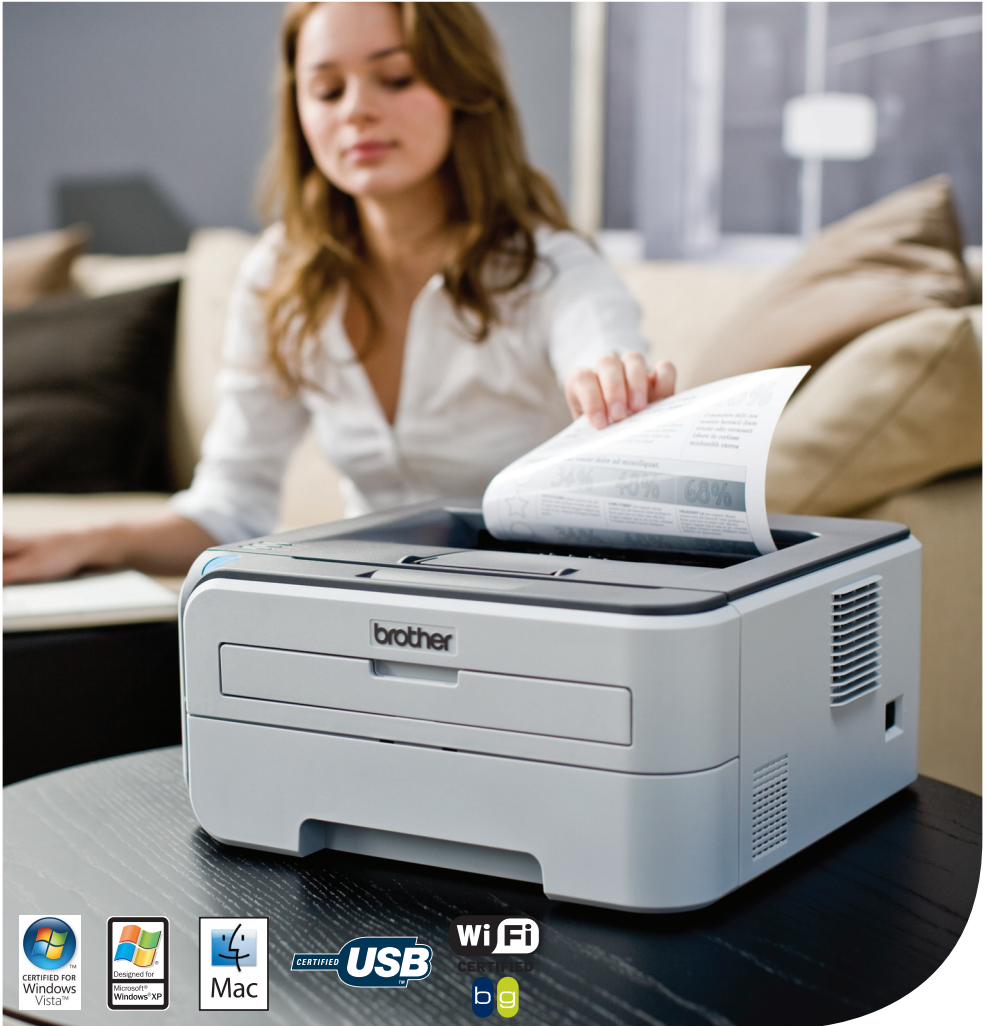

- Up to 22ppm mono print speed
- Full-Speed USB 2.0 connectivity
- Wired and wireless network ready
- Up to 250 sheet paper tray
- HQ1200dpi print resolution
- Cost effective consumables
- One year on-site warranty

# HL-2170W

---

With both wired and wireless network connectivity as standard, the Brother HL-2170W is designed to cope with the demands of multiple users.



**Whether you work from home or run a small business, it is important to keep an eye on costs. That is why low cost mono laser printers are often your best option. If it's quality and cost efficiency you're after, the Brother HL-2170W is at your side.**

**The Brother HL-2170W comes with both wired and wireless network connectivity as standard, which**

**allows users to send documents to the printer wherever they are in the office.**

**Using the quick start guide, it is simple to set up – so you can be printing your documents at up to 22ppm in no time.**

**With a 32MB memory large print jobs are handled quickly and**



efficiently, while the 250 sheet paper tray will save you time having to refill paper. Special paper types such as envelopes and labels can be managed through the manual feed slot, utilising the straight paper path option.

Compatible with Windows®, Mac® and Linux, the HL-2170W takes up minimum space so it can easily fit in anywhere around the office.

With its low price and the separate toner and drum, which means you only replace the toner or drum when necessary, it is sure to be a valued member of the team both now and in the future.

# HL-2170W Technical Specifications

General	
Technology	Electrophotographic
Print Speed A4	Up to 22ppm
First Print Out Time	Less than 10 seconds
Resolution	HQ1200 (2400 x 600), 600dpi, 300dpi
Processor	181MHz
Memory Capacity	32MB
Interface	Full-Speed USB 2.0
Network	10/100 Base-TX, Wireless LAN IEEE802.11b/g (Infrastructure Mode/Adhoc Mode)
IPv4 Supported Protocols	TCP/IP, ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS, DNS resolver, mDN, LLNMR responder, LPR/LPD, Port9100, IPP, FTP Server, POP before SMTP, SMTP AUTH, APOP, TELNET, SNMP, HTTP, TFTP, SMTP Client, ICMP, Web Services
IPv6 Supported Protocols	TCP/IP, NDP, RA, DNS resolver, mDNS, LLNMR responder, LPR/LPD, Port9100, IPP, FTP Server, POP before SMTP, SMTP AUTH, APOP, TELNET, SNMP, HTTP, TFTP, SMTP Client, ICMPv6, Web Services
Wireless Easy Setup	Secure Easy Setup™ (SES), Wi-Fi Protected Setup™ (WPS), AirStation OneTouch Secure System™ (AOSS) PCL®6
Emulation	PCL®6-49 Scalable Fonts, 12 Bitmap Fonts, 11 Barcodes
Resident Fonts	4 LED Toner (Yellow), Drum (Yellow), Error (Red), Go (Blue)
Display	

Paper Handling	
Paper Input	250 Sheets Standard Paper Tray 1 Sheet Manual Paper Feed Slot
Paper Output	100 Sheets (Face Down)

Media Specifications	
Media Types	Standard Paper Tray - Plain Paper, Bond Paper, Recycled Paper, Transparencies (up to 10 pages) Manual Feed Slot - Plain Paper, Bond Paper, Recycled Paper, Envelopes, Labels, Transparencies
Media Weights	Standard Paper Tray - 60 - 105 g/m2 (16 - 28 lb) Manual Feed Slot - 60 - 163 g/m2 (16 - 43 lb)
Media Sizes	Standard Paper Tray - A4, Letter, B5 (ISO/JIS), A5, B6 (ISO), A6, Exe Manual Feed Slot - Width 76.2 to 220 mm Length 116 to 406.4 mm

Printer Driver Software	
Windows®	Windows Vista™, Windows® XP Professional (32 & 64 bit editions) / XP Home Edition, Windows Server 2003® (32 & 64 bit editions), Windows® 2000 Professional
Macintosh®	Brother Laser Driver for Mac OS® X 10.2.4 or greater
Linux	GDI Printer Driver for Linux

Printer Driver Functions	
Printer Driver Features	N-up Printing - Reduce up to 2, 4, 9, 16 or 25 A4 pages to 1 A4 page Poster Printing - Enlarge 1 A4 page into a poster using 4, 9, 16 or 25 A4 pages Watermark Printing - Print documents with predefined text or user-defined messages Quick Print Set-up - Select print options in the driver quickly Manual Duplex - Manually print on both sides of the paper Status Monitor - A function for showing printer errors on your PC
Utilities	Web Based Management - Web browser print server management Driver Deployment Wizard - A quick and easy way to deploy Brother printer drivers on a Networked Windows® PC BR Admin Light - Print Server Management for Windows® and Mac OS® X 10.2.4 or greater BRAdmin Professional - For LAN management Web BRAdmin Professional - Server based management Utility / Windows® IIS(4.0/5.0) mode only
Web Download Utilities	<a href="http://solutions.brother.com">http://solutions.brother.com</a>

Supplies	
In-box Toner	Approx. 1,500 pages*
Standard Toner	TN-2110 - Approx. 1,500 pages*
High Yield Toner	TN-2120 - Approx. 2,600 pages*
Drum	DR-2100 - Approx. 12,000 pages

Dimensions / Weight	
Dimensions (W x D x H)	With carton 475x454x360mm Without carton 368x361x170.5mm
Weights	With carton 8.4kg, without carton 6.8kg

Others	
Power Consumption	460W printing 80W standby 8V sleep
Noise Level	Sound Pressure (Printing) LpAm= 51 dB (A) (Standby) LpAm= 30 dB (A) Sound Power (Printing) LWAd= 6.7 B (A) (Standby) LWAd= 4.5 B (A)
Ecology	Power Save - Consume less energy when not in use Toner Save - Reduces toner usage
Laser Classification	Class 1 Laser Product (IEC 60825-1:2001)

\*Declared yield values in accordance with ISO/IEC 19752



[www.brother.co.uk/originals](http://www.brother.co.uk/originals)

All Brother mono colour laser printers come complete with 12 months on-site warranty, upon registration.

For best results always use original Brother consumables to guarantee the best in high performance colour laser printing for your business.

Contact:

At your side.  
**brother**®

**Brother UK Ltd.,**

Audenshaw, Manchester M34 5JD

Tel: 0870 830 4000 (National rate call)

Fax: 0870 830 4031

Web-site: [www.brother.co.uk](http://www.brother.co.uk)

All specifications correct at time of printing. Brother is a registered trademark of Brother Industries Ltd.

Brand product names are registered trademarks or trademarks of their respective companies.