



Your connected, stylish, compact 3-in-1 wireless inkjet printer

DCP-J1260W



PRINT



SCAN



COPY



WIRELESS

www.brother.co.uk

Your connected, stylish, compact 3-in-1 wireless inkjet printer

Designed to fit perfectly into small spaces, the compact DCP-J1260W provides straightforward functionality and excellent print quality at an affordable price.

Easily print, scan and copy from one device. Wireless connectivity allows everyone in your household to print easily from their laptop or mobile device.

DCP-J1260W



Key features:

- Print up to 16 images per minute¹
- LED and keys
- 5GHz Wi-Fi and USB
- Print directly from or scan to PC and mobile app
- 150 sheet paper input¹¹
- Comes with 200 page black and 200 page colour yield inks
- 500 page black and 500 page colour maximum yield available⁹

Efficient

Simplify your day with clutter free paper management. The easily accessible 150 sheet front loading paper tray, protects your paper and makes replacing it quick and easy. Easily scan documents and send them directly to your desktop or mobile device.

Simple to use

Use your device with ease through the Brother Mobile Connect app and choose from a range of flexible connectivity options, including 5GHz Wi-Fi for faster connections or USB.

Connect for more control

Set up and print on the go with the Brother Mobile Connect app. Control all your Brother printers from the palm of your hand. Easily check ink levels, order and save on genuine Brother supplies, access your scanned documents history and personalise your frequently used features.



Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data.

The DCP-J1260W is 'secure by design', using triple-layer security at a device, network and document level, offering added peace of mind, guaranteeing that the integrity of your data is maintained at every step.

EPS-free, recyclable packaging

Our award-winning moulded pulp packaging replaces Expanded Polystyrene (EPS) within our printer packaging. Developed with advanced simulation technology, ensures durability and flexibility for safe product delivery. It uses fewer resources, making it environmentally friendly and easy to recycle. Find out more: brother.eu/packaging



Subscribe to A BETTER WAY TO PRINT



Automatic
ink delivery



Flexible monthly
print plans




Extended
printer warranty



Find out more at: brother.co.uk/ecopro

EcoPro subscription is not available in all countries, check your local country for availability

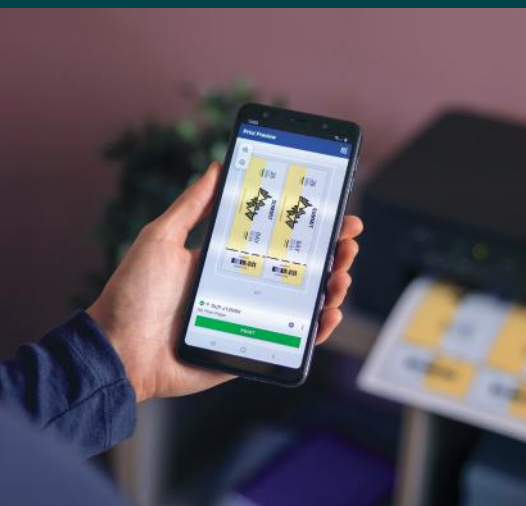

General

Technology

Inkjet

Memory

128MB

Control panel

LED and keys

Local interface

Hi-speed USB 2.0

Wireless network

2.4GHz and 5GHz support

Carton contents

Device, in-box inks, power supply cord, quick set-up guide, warranty card

Print

Print speed (A4)¹

1-sided: 16.0 ipm mono / 9.0 ipm colour

FPOT²

(First Print Out Time)

9.6 seconds colour / 6.2 seconds mono

Quiet mode

A mode to reduce the printing noise

Resolution

Up to 1200 x 6000dpi

Printer functions

N-up printing

Reduce up to 16 pages into a single page

Poster printing

Enlarge a single page into a poster using 2x2, 3x3 pages

Watermark printing

Watermark your documents with predefined text, custom logo or custom messages

ID printing

Add identification to your printed documents (date and time, short custom message or PC username)

Booklet printing

Print documents in A5 booklet format

Print profiles

Store your favourite driver settings as profiles to easily recall them

Manual 2-sided print

Yes

Mirror print

Reverses the printed image on the page from left to right

Reverse print

Rotate the content of a printed document by 180°

Colour enhancement

Adjust the colour in the image for better print quality

Borderless print

Print up to A4 / Letter without margins

Printer drivers

Windows

Windows 11 (32 and 64 bit editions) and more

MacOS

Printing via MacOS requires the use of AirPrint. Mac drivers are not provided.

ChromeOS

Supports native ChromeOS printing

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Paper handling¹¹	Paper input Standard tray 150 sheets Paper output 50 sheets A4	Media sizes Standard tray A4, LTR, LGL, Folio, EXE, A5, A6, Photo (102 x 152mm), Indexcard (127 x 203mm), C5 Envelope, Com-10, DL Envelope, Monarch, Photo-L (89 x 127mm), Mexico Legal, India Legal Scanner glass Up to A4 / Letter	Media type and weights Standard tray Plain, inkjet, glossy, recycled 64 - 220gsm
------------------------------------	---	---	--

Mobile and web connectivity

Brother mobile connect¹⁷ (Android/Harmony OS) Print from, scan to, preview copies and check the machine status from an Android device	Brother mobile connect¹⁷ (iPad / iPhone) Print from, scan to, preview copies and check the machine status from an iPad / iPhone
--	--

Apple AirPrint¹⁷ Print from and scan to most common file types from any AirPrint enabled application	Brother print service plugin¹⁷ Print from an Android devices without a dedicated App	Mopria™ ¹⁷ Print most common file types from Mopria™ supported Android devices
---	---	---

Copy

Copy speed (A4)⁴ 1-sided: 11.0 ipm mono / 3.5 ipm colour	Resolution Up to 1200 x 1800dpi mono and colour	FCOT⁶ (First Copy Out Time) 13.0 seconds mono / 28.5 seconds colour
---	---	--

Copy functions

Multi-copy Makes multiple copies of a document. Up to 99 copies in original document order	Enlargement/reduction ratio Reduce or increase document sizes from 25% to 400% in 1% increments	2-in-1 ID copying Allows the user to copy both sides of an ID card to a single A4 sheet N-in-1 copying Allows the user to compress 2 or 4 pages on to a single A4 sheet
--	---	--

Scan	Scanner type CIS (Contact Image Sensor)	Scan resolution from scanner glass 1200 x 2400dpi	Colour depth 30 bit colour processing (input) 24 bit colour processing (output)
	Colour and mono scanning Yes	Interpolated scan resolution Brother scanner utility enhances up to 19,200 x 19,200dpi	Grey scale 10 bit colour processing (input) 8 bit colour processing (output)

Scanner functions

Supported file formats
PDF, JPEG, TIFF

Standard functions¹⁷
Scan to e-mail, image, file

Multi-page scan to single PDF

Yes - iPrint&Scan only

Base colour removal

Pull scan using iPrint&Scan desktop or push scan from control panel

Scan features

Auto Deskew

Scanner drivers

Windows

TWAIN and WIA
Windows 11
(32 and 64 bit editions)

MacOS

Scanning via MacOS requires the use of AirPrint. Mac drivers are not provided

ChromeOS

Supports native ChromeOS scanning

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Fleet management tools

BRAdmin^{16,17}

LAN/WAN management software

Embedded web server

Web based print management software embedded onto the device

Software

Brother iPrint&Scan desktop^{15,17}

Print from, scan to, preview copies and check the machine status from Windows or macOS PC

Utilities

Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service

Easy setup

Simple access to drivers and software for the installation of your Brother machine from support.brother.com

Connectivity

Wireless network

2.4GHz: IEEE 802.11 b/g/n
(infrastructure mode)
IEEE 802.11 g/n (wireless direct)

5GHz: IEEE 802.11 a/n
(infrastructure mode)
IEEE 802.11 a/n (wireless direct)

Wireless Direct®

Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)

Wireless setup support

Wi-Fi protected setup (WPS)

Mobile

Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

Local interface

Hi-speed USB 2.0

Security features

Wireless network security

WEP 64/128bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WPA3-SAE (AES)
*Wireless Direct supports WPA2-PSK (AES) only

SSL/TLS (IPPS, HTTPS)

IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP, SNMPv1/v2c, TFTP server, ICMP, Web Services (Print/Scan), SNTP Client, HTTP Server

IPv6

NDP, RA, mDNS, LLMNR Responder, DNS Resolver, LPR/LPD, Custom Raw Port/Port9100, IPP, SNMPv1/v2c, TFTP server, Web Services (Print/Scan), SNTP Client, ICMPv6, HTTP Server

IP filter

Restrict which network users can or cannot access the device over the network (IPv4)

SecureBoot

The integrity of the firmware is checked before allowing any user interaction. Only genuine Brother firmware can be used

Automatic intrusion detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware updates

In addition to allowing automatic updates the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Firmware encryption

During update firmware is transferred over a trusted HTTPS encrypted connection

Digitally-signed firmware

The firmware for Brother print and scan devices is digitally signed and secure

Certificate management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public certificate & private key for protected network communication

Restrict network protocol

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Supplies and consumables

In-box ink¹⁰

1 x 200 page starter (BK)
1 x 200 page starter (C,M,Y)

Standard yield ink⁹

LC521 BK - 500 pages
LC521 C,M,Y - 500 pages

Dimensions and weights

With carton (WxDxH)
461 x 218 x 461mm - 7.70kg

Without carton (WxDxH)
390 x 343 x 148.5mm - 6.30kg

Duty Cycle

Recommended monthly
Up to 1,000 pages

Operating environment

Power requirement
220 - 240V
AC 50/60Hz

Operating environment
Humidity 20 - 80%
10°C - 35°C
50°F - 95°F

Storage environment
Humidity 20 - 80%
0°C - 40°C
32°F - 104°F

Environment

Approx power consumption^{13,14}
Copying: 21W
Ready: 2.5W
Sleep: 0.6W
Power off: 0.15W

Sound pressure¹²
PC printing (colour/mono):
Approx. 55.0dB(A)

- 1 Print speeds based on ISO/IEC 24734
- 2 FPOT (First Print Out Time) based on ISO/IEC 17629
- 3 Scan speeds based on ISO/IEC 17991
- 4 ADF copy speeds ESAT based on ISO/IEC 24735
- 6 FCOT (First Copy Out Time) based on ISO/IEC 24735 Annex D
- 9 Approx. declared yield value in accordance with ISO/IEC 24711
- 10 The first time you install a set of ink cartridges the machine will use an amount of ink to fill the delivery tubes for high quality printouts. This process will only happen once. The amount of ink remaining⁹ will be a minimum of 200 pages BK and 200 pages CMY
- 11 Capacity calculated with 80gsm paper
- 12 Sound pressure and sound power level in accordance with ISO 7779
- 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
- 14 Power consumption single-sided printing and scanning, resolution: standard / document: ISO/IEC 24712 printed pattern
- 15 Windows and MacOS only
- 16 Windows only
- 17 Optional download
- 18 Requires an Internet connection



App Store, Mac, macOS and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries.
Google Play and the Google Play logo are trademarks of Google LLC.



Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.
www.brotherearth.com

All specifications correct at the time of printing and are subject to change.
Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

brother
at your side