

**MAXIFY BX110** with battery

# PRINT ON THE GO, WHEREVER YOU ARE



Stay on task with a rechargeable battery. Take control with wireless printing from a PC, laptop or smart device and print text or borderless photos up to A4. For fast results, save up to 5 templates and print at the touch of a button.



USB Charge

**USB charge**



Battery, Attachment

**Rechargeable battery**



Mobile Device  
Printing

**Tablet and smartphone  
ready**



Connectivity

**Connected**




Direct Wireless  
Connection

**Wireless Direct**



**1.44" OLED  
screen**



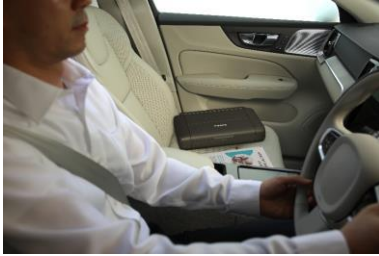

## Print on the road

Sleek and robust for easy transport, print up to 330 pages from a new battery's full charge<sup>1</sup> and top up in the office, at home or on the move via a USB Type C cable.



## Couple up with easy connectivity

Link up with Wireless Connect and control via the Canon PRINT app, AirPrint (iOS), Mopria<sup>®4</sup> (Android) or Windows 10 Mobile. No internet router? Tap into Wireless Direct.



## Look sharp with superb quality

Get crisp prints with superb quality in darker areas. Hybrid ink with a dedicated pigment black ink creates sharp text while dye-based colours give vivid prints with up to 100 years of album life<sup>2</sup>.



## Keep it simple

Print and check ink and connection status via the 1.44" OLED screen and work quietly and quickly with print speeds of 5.5ipm colour and 9ipm mono<sup>3</sup>.





## Custom fit

Save time with quick-fire printing. Store up to 5 custom templates to print contracts and forms straight from the printer without a PC, laptop or smart device.

## PRODUCT RANGE



**Canon MAXIFY BX110  
with battery**



# TECHNICAL SPECIFICATIONS

# MAXIFY BX110 with battery

## GENERAL SPECIFICATIONS

### Model Numbers

MAXIFY BX110 with battery

## PRINTER SPECIFICATIONS

### Print Resolution

Up to 4800 x 1200 dpi <sup>[1]</sup>

### Print Technology

2 ink cartridges: Black (Pigment BK) and Colour (BK, C, M, Y)  
Inkjet FINE print head  
ChromaLife100 System

### Mono Print Speed

Approx. 9.0 ipm <sup>[2]</sup>

### Colour Print Speed

Approx. 5.5 ipm <sup>[2]</sup>

### Photo Print Speed

Borderless 10x15cm : Approx. 53 seconds <sup>[3]</sup>

### Borderless Printing

Yes  
(A4, LTR, 4"x6", 5"x7", 7"x10", 8"x10", Card Size (91 x 55mm), Square (5" x 5", 3.5" x 3.5") <sup>[4]</sup>  
Manual operation

### Two Sided Printing

## CARTRIDGES AND YIELDS

### Standard Ink Cartridges

PGI-35 Black  
CLI-36 Color

### Cartridge Yield (Plain Paper)

A4 Colour Document <sup>[5]</sup>  
PGI-35 Pigment Black: 200 pages

### Cartridge Yield (Photo)

CLI-36 Colour: 260 pages  
10x15cm photo <sup>[6]</sup>  
CLI-36 Colour: 102 photos

## PAPER SUPPORT

### Paper Types

Plain Paper (64 g/m2 - 105 g/m2)  
Canon Océ Red Label Paper(WOP111)  
Canon Océ Office Colour Paper(SAT213)  
Canon High Resolution Paper (HR-101N)  
Canon Plus Glossy II (PP-201)  
Canon "Everyday Use" (GP-501)  
Canon Matte (MP-101)  
Canon Double Sided Matte (MP-101D)  
Envelopes  
Greeting Card (manufactured by Avery and RedRiverPaper)  
Removable Photo Stickers (RP-101)  
Magnetic Photo Paper (MG-101)

### Maximum Paper Input

### Paper Sizes

Rear Tray: Max. 50 sheets (plain paper)  
Rear Tray: A4, A5, B5, LTR, LGL, Envelopes (DL, COM10), Square (5"x5", 3.5"x3.5"), Card Size (91 x 55 mm), 4"x6", 5"x7", 7"x10", 8"x10"  
[Custom size]  
width 55 mm - 215.9 mm, length 89 mm - 676 mm  
Rear Tray: Plain paper: 64 - 105 g/m²  
Canon specialty paper: max paper weight : approx. 275 g/m2  
(Photo Paper Plus Glossy II PP-201)

## INTERFACE

### Display Type & Size

### Display Languages

1.44"/3.6cm OLED Display (Monochrome)  
33 Languages Selectable: Japanese/English (mm & inch)/German/French/Italian/Spanish/BR Portuguese/Dutch/Danish/Norwegian/Swedish/Finnish/Russian/Ukrainian/Polish/Czech/Slovenian/Hungarian/Slovakian/Croatian/Romanian/Bulgarian/Turkey/Greek/Estonian/Latvian/Lithuanian/Simplified Chinese/Korean/Traditional Chinese/Thai/Indonesia/Vietnamese

## CONNECTIVITY

### Wireless LAN

Communication Protocol: SNMP/ HTTP/TCP/IP (IPv4/IPv6)  
TLS 1.3/1.2/1.1/1.0  
Supported Standards: IEEE802.11n / IEEE802.11g / IEEE802.11b / IEEE802.11a / IEEE802.11ac <sup>[7]</sup>  
Frequency Bandwidth: 2.4GHz / 5GHz  
Range: Indoor 50 m ※depends on the transmission speed and conditions  
Security: WPA-PSK(AES)  
WPA2-PSK(AES)  
WPA3-SAE(AES)  
WPA-EAP(AES)\*  
WPA2-EAP(AES)\*  
WPA3-EAP(AES)\*  
\* IEEE802.1X(EAP-TLS/EAP-TTLS/PEAP) available

## Interface

### Mobile Apps

### Printer Features

Hi-Speed USB (USB Type C)  
Canon PRINT app <sup>[8]</sup>  
Easy-PhotoPrint Editor app <sup>[9]</sup>  
Cloud Link (print only) <sup>[10]</sup>  
Apple AirPrint  
Canon Print Service Plugin (Android) <sup>[11]</sup>  
Mopria (Android) <sup>[12]</sup>  
Wireless Direct Connection 2.4GHz & 5 GHz <sup>[13]</sup>  
Amazon Alexa™ <sup>[14]</sup>

### Smart Assistant & Automation Support

## SOFTWARE

### Supported Operating Systems

Windows 11, Windows 10, Windows 8.1, Windows 7 SP1  
Operation can only be guaranteed on a PC with pre-installed operating system.  
Printer Driver and IJ Printer Assistant Tool support the following OS: Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019, Windows Server 2022 and Windows Server 2025.  
Display environment: XGA 1024 x 768 or more  
Mac: macOS Big Sur 11.7.6 - macOS Sequoia 15  
Mobile Operating Systems: iOS®, iPadOS, Android™, Chrome OS <sup>[15]</sup>  
Printer Driver  
IJ Printer Assistant Tool  
Easy-PhotoPrint Editor (download) <sup>[16]</sup>  
Easy-Layout Editor (download)

### Software Included

## PORTABLE BATTERY

### Type

### Voltage Level

### Charging Time (hrs)

### Remaining Indication

### Printable Pages

Lithium-ion  
DC10.8V 2170mAh  
Approx. 2 hours 20 min (AC adaptor)  
Approx. 5hours (USB1.5A)  
LED 4 steps  
approx. 330 sheets(USB connection to PC) <sup>[17]</sup>

## PHYSICAL FEATURES

### Weight

### Dimensions (W x D x H)

### Acoustic Noise Levels

### Recommended Operating Environment

### Power Source

### Power Consumption

Approx. 2.3 kg  
Approx. 322 x 210 x 66 mm with the trays retracted  
Approx. 322 x 307 x 245 mm with the trays extended  
Approx. 40.5dB(A) (PC Print on Plain Paper) <sup>[18]</sup>  
Temperature: 5-35°C  
Humidity: 10-90%RH (no dew condensation)  
AC 100-240V, 50/60Hz  
Off: Approx. 0.15W  
Printing: Approx. 8W <sup>[19]</sup>  
Standby (USB connection to PC): Approx. 1.1W  
Standby (all ports connected): Approx. 1.6W\*  
Time to enter Standby mode: 3 minutes 7 seconds\*  
\*<EU only - for ErP Lot 26 regulation>  
0.24 kWh <sup>[20]</sup>

### Typical Electricity Consumption

## Footnotes

- [1] Ink droplets can be placed with a minimum pitch of 1/4800 inch
- [2] Document print speeds are the averages of ESAT (Word, Excel, PDF) in Office Category Test for the default simplex mode, ISO/IEC 24734. Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.
- [3] Photo print speed is based on default driver setting using ISO/JIS-SCID N2 standard on Canon Photo Paper Plus Glossy II and does not take into account data processing time on host computer.
- [4] Paper types NOT supported for borderless printing are as follows: Envelope, High Resolution Paper, T-Shirt Transfer, Photo Stickers
- [5] Page Yield is the estimated value based on Canon individual test method using the ISO/IEC 24712 chart and continuous printing simulation with the replacement after initial setup.
- [6] Page Yield is the estimated value based on Canon individual test method using the ISO/IEC 29103 chart and continuous printing simulation with the replacement after initial setup.
- [7] Wireless printing requires a working network with wireless 802.11b/g/n/a/ac or a capability, operating at 2.4GHz or 5GHz. Wireless performance may vary based on terrain and distance between the printer and wireless network clients.
- In some countries/regions, Wi-Fi 5GHz is not supported either infrastructure nor direct mode.
- [8] Requires an Internet connection and the Canon PRINT app, available for free on the App Store and at Google Play. Compatible with iOS, iPadOS devices running iOS 16 or later, and Android mobile devices running Android 7 or later. Your device must be connected to the same working network with wireless 802.11 b/g/n/a/ac capability as your printer.
- [9] The Easy-PhotoPrint Editor mobile application requires an Internet connection and the Easy-PhotoPrint Editor app v1.9.0, available for free on the App Store and at Google Play. Compatible with iOS and iPadOS devices running iOS 15 or later, and Android mobile devices running Android 7 or later. Certain exceptions may apply.
- [10] Requires an Internet connection and the Canon PRINT app, available for free on the App Store and at Google Play. Compatible with iOS, iPadOS devices running iOS 16 or later, and Android mobile devices running Android 7 or later. Your device must be connected to the same working network with wireless 802.11 b/g/n/a/ac capability as your printer.
- [11] Canon Print Service is a print plug-in for Android smart devices, which enables printing from Android 7 onwards devices to many Canon printers via a Wi-Fi network. The plug-in does not work as a standalone app. Available for free at Google Play.
- [12] Requires Android mobile device with Android 4.4 operating system or later with the Mopria Print Service pre-loaded with that device and the compatible PIXMA printer on the same wireless network. The Mopria experience is also available on Android 4.4 mobile devices with a download of the Mopria Print Service from Google Play.
- [13] In some countries/regions, Wi-Fi 5GHz is not supported either infrastructure nor direct mode.
- [14] Requires an active smart assistant account linked and accompanying app enabled, the smart device and printer to be actively connected with permission to the Canon Inkjet Cloud Printing Center, and the required action(s), skill(s), or applet(s) available/enabled to the compatible printer. Voice commands can not be displayed as text on Amazon smart devices with screens. Only English, French and German supported.
- [15] Some functions may not be available with these Operating Systems. Please refer to the manual or website for details.
- [16] The Easy-PhotoPrint Editor software requires an Internet connection. The Easy-PhotoPrint Editor software v1.9.0 is compatible with the following operating systems; Microsoft Windows 11 (64-bit), Windows 10 (64-bit/32-bit), macOS High Sierra v10.13 onwards Minimum Windows and macOS/Mac OS X requirements are: 2GB of RAM and a monitor with 1024x768 resolution.
- [17] Conditions: Tested under normal temperature and humidity, using fully-charged new battery, printing ISO/IEC 24712 files (5 patterns) continuously in color on A4 plain paper in Standard mode of printer driver.

[18] Acoustic Noise is measured based on ISO7779 standard with default setting.

[19] Print: When printing ISO/JIS-SCID N2 on A4 size plain paper using default settings. Specifications are subject to change without notice.

[20] Typical Electricity Consumption (TEC) value: TEC value was calculated assuming the unit will be constantly switched among operational mode, sleep mode, and power-off mode for 5 days, and that it will be either in sleep or power-off mode for the remaining 2 days within the same week. The TEC value of this product is calculated by Canon on their own accord using TEC measurement procedure regulated in International ENERGY STAR Program.

## Standard disclaimers

All specifications subject to change without notice.

Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.

Ink yield may vary depending on texts/photos printed, applications software used, print mode and type of paper used. For yield information see [www.canon-europe.com/ink/yield](http://www.canon-europe.com/ink/yield)

All brand and product names are trademarks of their respective companies.

Microsoft, Windows and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries.

**PRINT ON THE GO,  
WHEREVER YOU ARE**

## MAXIFY BX110 with battery

Stay on task with a rechargeable battery. Take control with wireless printing from a PC, laptop or smart device and print text or borderless photos up to A4. For fast results, save up to 5 templates and print at the touch of a button.



**Sales Start Date: April 2025**

### Product details

Product Name	Mercury Code	EAN Code
MAXIFY BX110 with battery EUR	7069C042	8714574692357

### Consumables

Accessory Name	Mercury Code	EAN Code
<b>Standard size</b>		
PGI-35BK	1509B001	4960999391731
CLI-36CLR	1511B001	4960999391762
<b>Twin Packs</b>		
PGI-35 Black Twin	1509B012	8714574572444
CLI-36 Colour Twin	1511B025	8714574572178
<b>Optional Extras</b>		
Battery Kit LK-72	4228C003	4549292160871

**PRINT ON THE GO,  
WHEREVER YOU ARE**

## MAXIFY BX110 with battery

Stay on task with a rechargeable battery. Take control with wireless printing from a PC, laptop or smart device and print text or borderless photos up to A4. For fast results, save up to 5 templates and print at the touch of a button.



### Measurement / logistic information

Product Name	Mercury Code	Pack Style	Quantity per pack	Length (mm)	Width (mm)	Height (mm)	Gross Weight (kg)	Net Weight (kg)
MAXIFY BX110 with battery EUR	7069C042	Individual	1	1152	904	924	220.3	172.2
		Pallet (Upper)	18 (TBC)	1152	904	1228	292.2	229.6
		Pallet (Bottom)	18 (TBC)	1152	904	1228	292.2	229.6

**PRINT ON THE GO,  
WHEREVER YOU ARE**

## MAXIFY BX110 with battery

Stay on task with a rechargeable battery. Take control with wireless printing from a PC, laptop or smart device and print text or borderless photos up to A4. For fast results, save up to 5 templates and print at the touch of a button.



### What's in the box

#### MAXIFY BX110 with battery

- Canon MAXIFY BX110 with battery
- AC Adapter
- Power cord
- Ink Tanks: PGI-35 Pigment Black, CLI-36 CMYK Colour
- Print Head
- Set-up CD-ROM
- USB Type C cable
- LK-72 Rechargeable battery attachment
- Manuals and other documents

