

 Lexmark™

C2325dw

Reliability. Security. Productivity.




C2325dw



# Lexmark C2325dw

Affordable colour is the essence of the Lexmark C2325dw, the printer that helps you control the cost of colour printing that speeds up to 23 ppm\*. Built for reliability, performance and security, the Lexmark C2325dw comes equipped with both built-in Wi-Fi and tools to minimise toner consumption.

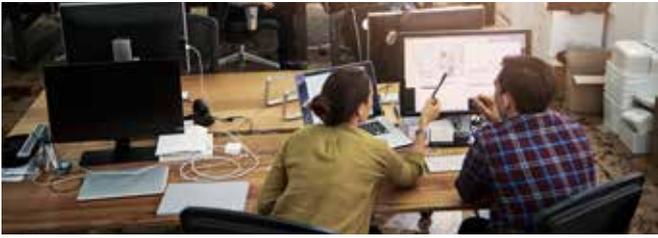

## Ready when you are

- ▶ 1-GHz dual-core processor and 512 MB memory drives printing at up to 23 ppm.\*
- ▶ Steel frame and durable design stands up to heavy use and harsh environments.
- ▶ Long-life fuser and imaging components extend uptime.
- ▶ Unison™ Toner replacement cartridges deliver up to 2300 colour and 3000 monochrome pages\*\*.
- ▶ Keep printing in black even when colour toner is empty.

## Colour that keeps saving

- ▶ PANTONE® calibration, embedded colour sample pages and Lexmark Colour Replacement produce accurate, professional colour output in-house.
- ▶ Save toner with suite of tools that let you choose when and how much colour to print.

## Input that works

- ▶ Reliable, flexible media handling supports cardstock, small media, and envelopes from the main tray or a convenient single-sheet feeder.
- ▶ Get 251 pages of total input.

## Interact with ease

- ▶ Two-line monochrome LCD lets you configure, interact and monitor vital system information.
- ▶ Compact footprint allows flexible placement in more locations.
- ▶ Connect easily via Ethernet, USB, Wi-Fi or simple mobile printing options.

## Full-spectrum security

- ▶ Lexmark's full-spectrum security architecture helps keep your information safe—in the document, on the device and over the network.
- ▶ Keypoint Intelligence - Buyers Lab honoured Lexmark with a prestigious BLI PaceSetter award for Document Imaging Security\*\*\*.



## Built for planet earth

- ▶ Energy management features reduce power consumption in active use or sleep mode.
- ▶ Standard two-sided printing saves paper.
- ▶ Recycle cartridges through the award-winning Lexmark Cartridge Collection Programme (LCCP).

\*Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).  
\*\*Average continuous black or continuous composite colour (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798. Actual yield will vary considerably based upon many factors. See [www.lexmark.com/yields](http://www.lexmark.com/yields) for more information.  
\*\*\*Award based on Western Europe data

# Lexmark C2325dw



1 C2325dw with 2-line LCD  
308 x 442 x 421 mm

Adjustable printer stand (not shown)  
521 x 653 x 625 mm

Swivel cabinet (not shown)  
263 x 476 x 600 mm

■ Standard  
■ Optional

Note 1: Does not support optional trays.

Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at [http://www.lexmark.com/publications/furniture\\_safety/](http://www.lexmark.com/publications/furniture_safety/)

© 2018 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. AirPrint and the AirPrint Logo are trademarks of Apple, Inc. Google Cloud Print is a trademark of Google, Inc. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are trademarks, service marks, and certification marks of Mopria Alliance, Inc. in the United States and other countries. PANTONE®, PANTONE® Goe™ and other Pantone, Inc. trademarks are property of Pantone, Inc. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit ([http:// www.openssl.org/](http://www.openssl.org/)).

**Product specifications**
**Lexmark C2325dw**
**Print**

Display	16 character, 2-line backlit All Points Addressable (APA) LCD Display
Print Speed: Up to <sup>5</sup>	Black: 23 ppm / Colour: 23 ppm
Time to First Page: As fast as	Black: <10.1 seconds / Colour: <10.1 seconds
Print Resolution	Black: 1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi)
Memory / Processor	Standard: 512 MB / Maximum: 512 MB / Dual Core, 1000 MHz
Hard Disk	Not Available
Recommended Monthly Page Volume <sup>1</sup>	500 - 5000 pages
Maximum Monthly Duty Cycle: Up to <sup>2</sup>	60000 pages per month

**Supplies<sup>6</sup>**

Laser Cartridge Yields (up to)	1,000-page Black and Colour (CMYK) Cartridges, Average continuous cartridge yield is stated number of standard pages as listed. Declared yield value in accordance with ISO/IEC 19798., 2,300-page Colour (CMY) High Yield Cartridges, 3,000-page Black High Yield Cartridge
Photoconductor Estimated Yield: Up to <sup>4</sup>	40,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage
Cartridge(s) Shipping with Product	1,400-page Black Starter Return Program Toner Cartridge, 750-page Colour (CMY) Starter Return Program Toner Cartridge

**Paper Handling**

Included Paper Handling	250-Sheet Input, 125-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed
Paper Input Capacity: Up to	Standard: 250+1 pages 75 gsm bond / Maximum: 250+1 pages 75 gsm bond
Paper Output Capacity: Up to	Standard: 125 pages 75 gsm bond / Maximum: 125 pages 75 gsm bond
Media Types Supported	Card Stock, Paper Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Hagaki Card, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6

**General Information<sup>3</sup>**

Standard Connectivity	USB 2.0 Specification Hi-Speed Certified (Type B), 802.11b/g/n Wireless, Ethernet 10/100BaseTX (RJ-45), also works with 1000Base-T
Noise Level: Operating	Print: 48 dBA
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 Meters (10,000 Feet), Temperature: 10 to 32°C (50 to 90°F)
Product Guarantee	4-year guarantee (upon registration)
Size (mm - H x W x D) / Weight	308 x 442 x 421 mm / 20.4 kg

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

<sup>1</sup>"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>2</sup>"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>3</sup>Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details. <sup>4</sup>Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. <sup>5</sup>Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds). <sup>6</sup>Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details.